


*NOTE : Normally, place jumper between COM and GND (J2 pin5 and pin6).

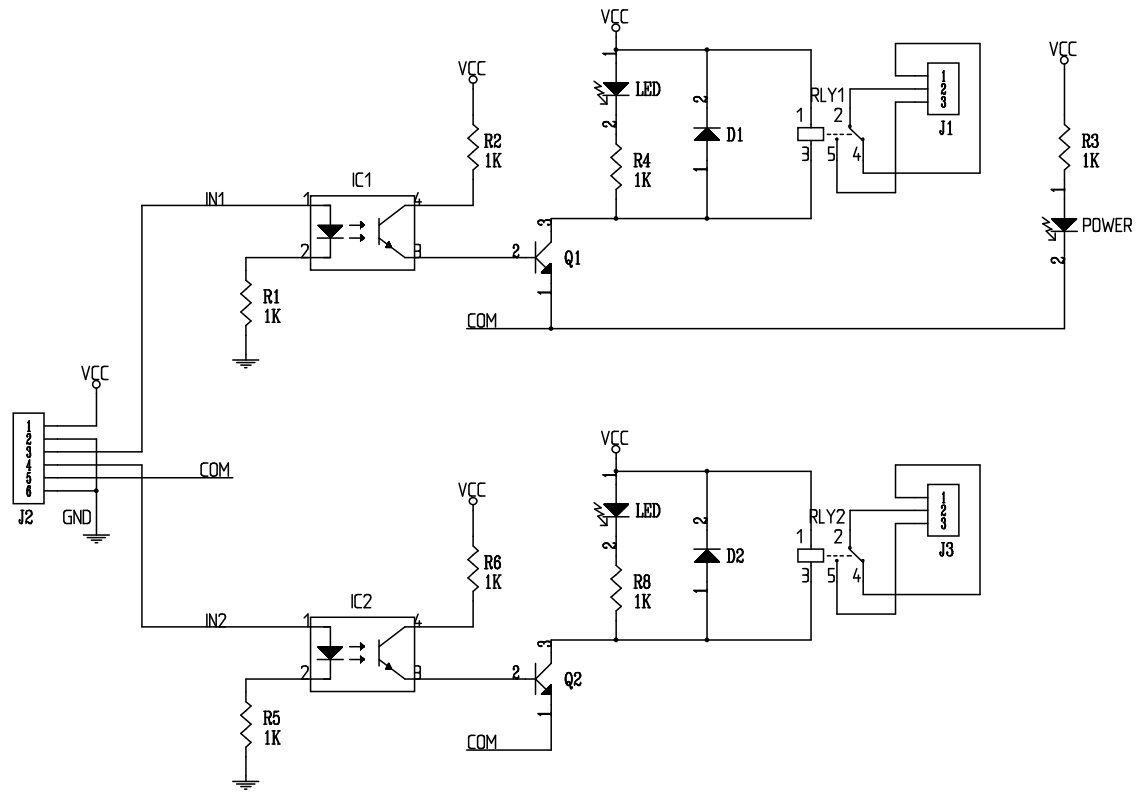

			DRAWN BY	CHECKED BY	APPROVED BY	GI ELECTRONIC www.gie.com.my	DOCUMENT TITLE: 2 RELAY MODULE WITH OPTOCOUPLE	REVISION 01
		DROC003	NAME:	NAME:	NAME:	This document is confidential and must not be copied or disclosed in part or full without consent. © Copyright GI ELECTRONIC	Date : 2013	SHEET 1 OF 1
REF	REV	DCN NO.	DATE:	DATE:	DATE:			